

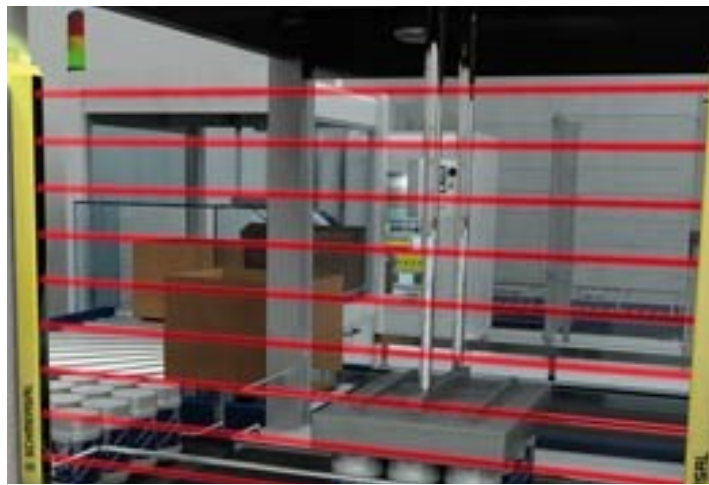



SLC440COM Compact Safety Light Curtains

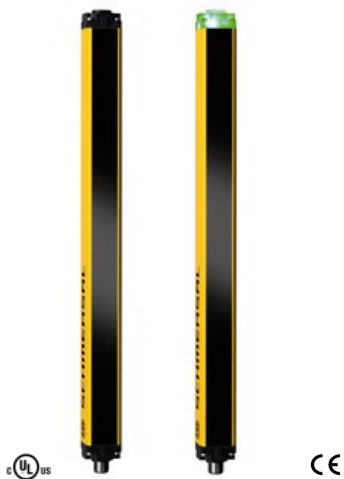


Features



Rugged closed housing profile



Protection height runs full length

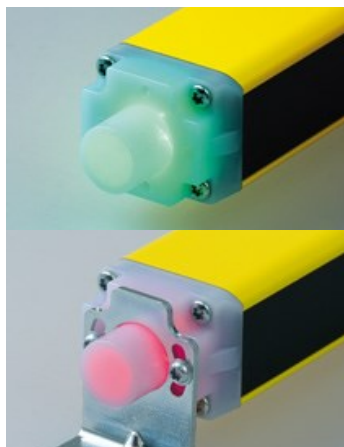

Output status LED endcap

Overview

The SLC440COM Series is a version of the SLC440 Type 4 safety light curtains and grids designed without the 7 segment display or many of the integrated functions, offering only automatic and re-start modes. This series offers a cost effective option to machine builders and manufacturing facilities to select an appropriate safety light curtain for an application that may not need the functions integrated in the standard SLC440 series.

A major benefit of the SLC445COM is the zero dead space design which provides customers with a full protected height for the entire length of the light curtain. This is ideal for applications with space limitations or that require full length protection.

Operating status is clear and can be seen from a distance. The end cap of the receiver unit is molded from a semitransparent plastic that is illuminated by LED. It shows green for proper operation and red for a fault.

The SLC440COM series features a one-piece extruded reinforced housing in a compact 28 mm x 33 mm rectangular profile. This housing profile has proven to be less susceptible to mechanical damage and misalignment from torsion or bending.

SLC440COM Safety light curtains are used for the protection of hazardous areas, and are available with resolutions of 14, 30, or 35 mm and protection field heights between 330 and 1770 mm. They are also available for perimeter guarding as safety light grids (SLG440COM) with 2, 3, or 4 beams. The series is suited for use in safety circuits up to PLe (EN 13849) or SIL3 (IEC 61508).

Applications

- Power-driven machines
- Power presses for the metal and plastics industry
- Folding or brake presses
- Filter presses
- Punching machines
- Robot cells
- Welding booths
- Printing machines
- Injection molding
- Materials handling and storage technology
- Palletizers
- Packaging equipment

Available Literature



SLC440/445 Brochure, 10 pages

Ordering Details

SLC440COM-ER①-②

- ① Protection Height: (mm)
- | | | | |
|-------|-------|-------|-------|
| 0330 | 0410 | 0490 | 0570 |
| 0650 | 0730 | 0810 | 0890 |
| 0970 | 1050 | 1130 | 1210 |
| 1290* | 1370* | 1450* | 1530* |
| 1610* | 1690* | 1770* | |
- *only for 30, 35 mm resolution

- ② Resolution: (mm)
- | | |
|----|---------------------------|
| 14 | with range: 0.3 m to 7 m |
| 30 | with range: 0.3 m to 10 m |
| 35 | with range: 0.3 m to 7 m |

Mounting hardware included

Accessories

Connector cables

- KA-0804** 5 m cable for emitter
KA-0805 10 m cable for emitter
KA-0808 20 m cable for emitter

A-K5P-M12-S-G-5M-BK-2-X-A-1
 For receiver: M12, 5 pole connector, 5 meters

A-K5P-M12-S-G-15M-BK-2-X-A-1
 For receiver: M12, 5 pole connector, 15 meters

Mounting

- MS-1100** Mounting kit
MS-1110 Center support
MSD5 Spacers

Deflection mirrors

- ULS-MLC-0200** 200 mm height
ULS-MLC-0350 350 mm height
ULS-MLC-0500 500 mm height
ULS-MLC-0650 650 mm height
ULS-MLC-0800 800 mm height
ULS-MLC-0950 950 mm height
ULS-MLC-1250 1250 mm height
ULS-MLC-1550 1550 mm height
ULS-MLC-1700 1700 mm height

Compatible Safety Controllers

- SRB-301MA** **SRB-301MC**
SRB-301ST-24 **SRB-301LCB**
SRB-504ST **SRB-211ST**
SRB-324ST **SRB-031MC**

Bold part numbers are regularly stocked

Contact

Schmersal USA
 660 White Plains Road
 Suite 160
 Tarrytown, NY 10591
 Tel: 914-347-4775
 Fax: 914-347-1567
 E-mail: salesusa@schmersal.com

Schmersal Canada
 15 Regan Road
 Unit # 3
 Brampton, ON L7A 1E3
 Tel: 905-495-7540
 Fax: 905-495-7543
 E-Mail: salescanada@schmersal.com